


Features



- For conditions where pulsating or vibration exists
- Vibration and shock resistant
- Size: 2 ½”
- Vent plug in case top
- Scale Range: 0-30 psi, 0-100 psi, 0-145 psi
- Dual units scale: Psi/Bar
- Filling: 99.7% Glycerin
- Case: Stainless Steel or plastic
- Connection: ¼” Copper Alloy
- Wetted Parts: Copper Alloy
- Accuracy: 1.5% of Span
- Op. Temp.: -20°C to 60°C
- Operating Pressure:
- Constant: 3/4 of scale range

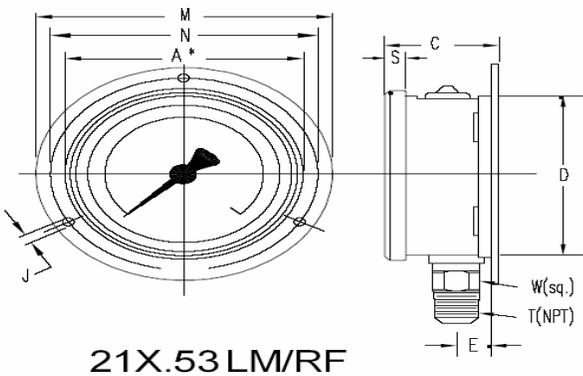

Type/Size	Weight	KEY	A*	C	D	E	J	M	N	S	T	W
213.53	0.44 lbs.	mm	63	32	62	13	3.6	85	75	6.5	--	14
2.5”		In.	2.5	1.26	2.44	0.51	0.14	3.35	2.95	0.26	1/4”	0.55

